


2 Dc charging stand



Product size:

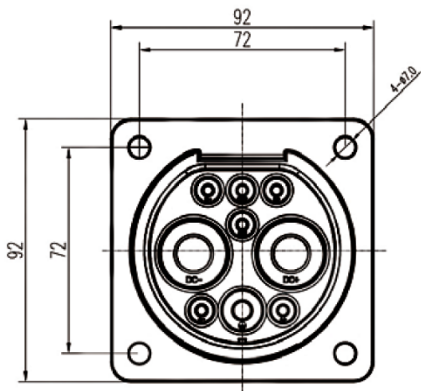

Product feature:

- ◆ Comply with GB/T 20234.1/2-2015 regulations and requirements.
- ◆ Protection level up to IP55 (after insertion)
- ◆ Reliable material, flame retardant, pressure resistance, wear resistance, impact resistance, high oil resistance.
- ◆ The product design has the function of over-temperature protection
- ◆ Mechanical life: no load plug and pull > 10000 times
- ◆ Coupling plugging force: < 140N
- ◆ Shell material: thermoplastic, flame retardant grade UL94-V0
- ◆ Sleeve: copper alloy, silver plated surface
- ◆ Operating temperature: -30°C ~ +50°C
- ◆ Rated working current: 80/125/200/250A
- ◆ Rated operating voltage: 750/1000V
- ◆ Insulation resistance: > 2000MΩ (DC1000V)
- ◆ Terminal temperature rise: < 50K
- ◆ Withstand voltage: 3500V
- ◆ Contact impedance: 0.5mΩ MAX

Product model:

Type	current/voltage	Cable specification
JL-80A1	80A/750/1000V	2*25mm ² +1*25mm ² +2*4mm ² +7*1.0mm ²
JL-125A1	125A/750/1000V	2*35mm ² +1*25mm ² +2*4mm ² +7*1.0mm ²
JL-200A1	200A/750/1000V	2*50mm ² +1*25mm ² +2*4mm ² +7*1.0mm ²
JL-250A1	250A/750/1000V	2*70mm ² +1*25mm ² +2*4mm ² +7*1.0mm ²
JL-250A2	250A/750/1000V	2*80mm ² +1*25mm ² +2*4mm ² +7*1.0mm ²