
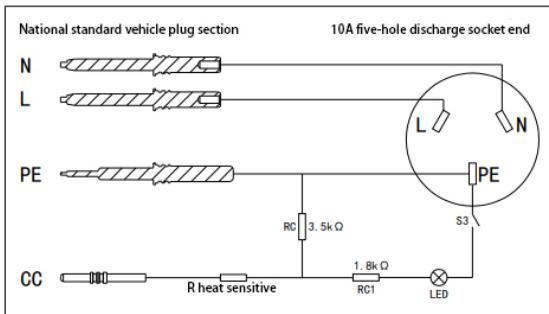


5 AC V2L



Input voltage range	Single phase 220~240VAC
Maximum input current	10A
Insulation resistance	> 500MΩ
Voltage resistance	2000V AC 60s The leakage current is less than 10mA
Mechanical life	≥10000
Insertion and separation forces	< 90N
Used material	Housing material: PA66, Panel material: PC
Flame retardant rating	UL94 V-0
Operating temperature	-30°C ~ +80°C
IP Rate	IP55 (Take the plug of the stun gun and the socket of the vehicle)
executive standard	GB/T20234.1-2015 、 GB/T20234.2-2015 、 GB/T18487.1-2015 、 GB/T11918.1-2014、 GB2099.1-2008、 GB1002-2008、 QCT1088-2017