


10 7KW wall-mounted DC charging pile (IP65)

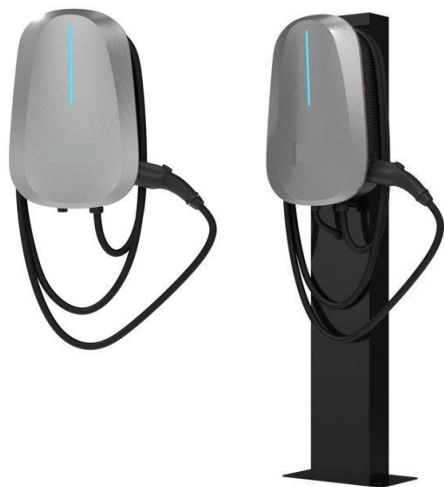

7KW wall-mounted DC charging pile (IP65)

	Mode of connection	L,N,PE
Specifications	Input voltage range	Single phase 90Vac to 265Vac
	Maximum input current	32A
	Frequency	47Hz-63Hz
	Maximum output power	7kW, constant power 350V above
	Maximum output current	20A
	Adjustable output voltage range	100Vdc ~ 750Vdc
	Output leakage current	<3.5mA@264Vac
	Output power factor	≥0.99@220Vac 50-100% Load
Environment	Operating temperature	-20°C to 55°C
	Humidity	Max. 93% (relative humidity)
	Altitude	≤2000m
	IP rate	IP65
	Cooling mode	Forced cooling
	Size (W*H*D)	340*520*160mm
Structure	Housing material	Aluminum
	Net weight	≤15KG (With head)
	Output wire	5M 9-hole DC head
	Noise	≤50dB(A)
Protection mechanism	Against Low voltage, over voltage, leakage protection, over temperature protection, over current, over voltage protection, abnormal gun protection, over temperature protection, MCU function error detection	
Status display	LED	
Communication mode	4G, Bluetooth	
Standard	GB/T 18487.1/.2、GB-T 27930、ETSI300132-3 (Surge current)	