


9 7KW、11KW、21KW Ac charging pile

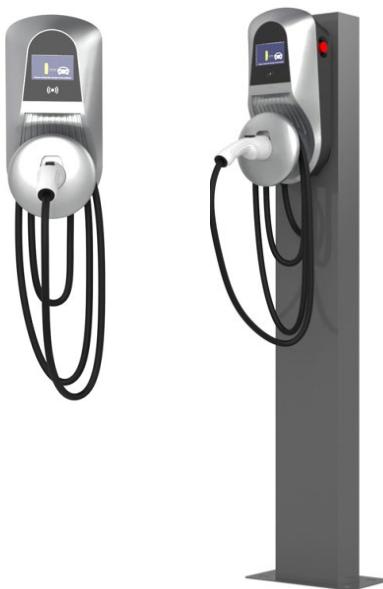

| | |
|----------------------------------|---|
| Rated output power | 7KW (32A) ,11KW(16A), 21KW (32A) |
| Input rated values: | 220V 50Hz/380V 50Hz |
| Storage temperature | -30—70°C |
| Operating temperature | -25—55°C |
| Humidity | 5%—95% |
| Storage relative humidity | ≤95% |
| IP rate | IP55 |
| Protection mechanism | Against Low voltage, over voltage, lightning strike protection, grounding fault, over current, control signal fault detection protection, leakage protection, over temperature protection, MCU function error detection |
| Standard | GB/T 18487.1/.2、GB/T20234.1/.2、GB/T 33594、GB/T 34657.1、NB/T 33002-2010 |